


- 1.0 PERFORMANCE
- 1.1 FREQUENCY RANGE: DC-11GHz
- 1.2 VOLTAGE RATING: 1000V RMS (sea level)
- 1.3 NOMINAL IMPEDANCE: 50 OHMS
- 1.4 DWV: 2500V RMS @ 60Hz (sea level)
- 1.5 TEMPERATURE RANGE: -65°C TO +165°C
- 2.0 MATERIALS
- 2.1 DIELECTRIC: PTFE
- 2.2 CENTER CONTACT: BeCu

- 2.5 ALL OTHER METAL PARTS: BRASS
- 3.0 FINISHES
- 3.1 CENTER CONTACT: SEE TABLE
- 3.2 ALL OTHER METAL PARTS: SEE TABLE
- 4.0 MECHANICAL
- 4.1 INTERFACE IN ACCORDANCE WITH MIL-STD-348

DWG NO. OL-0406-228-1		REV. A
PART NUMBER 0406-228-NS	BODY NICKEL	CONTACT SILVER

PLATING PER SAN-TRON SPEC. 7.3.1-8

DO NOT SCALE DRAWING

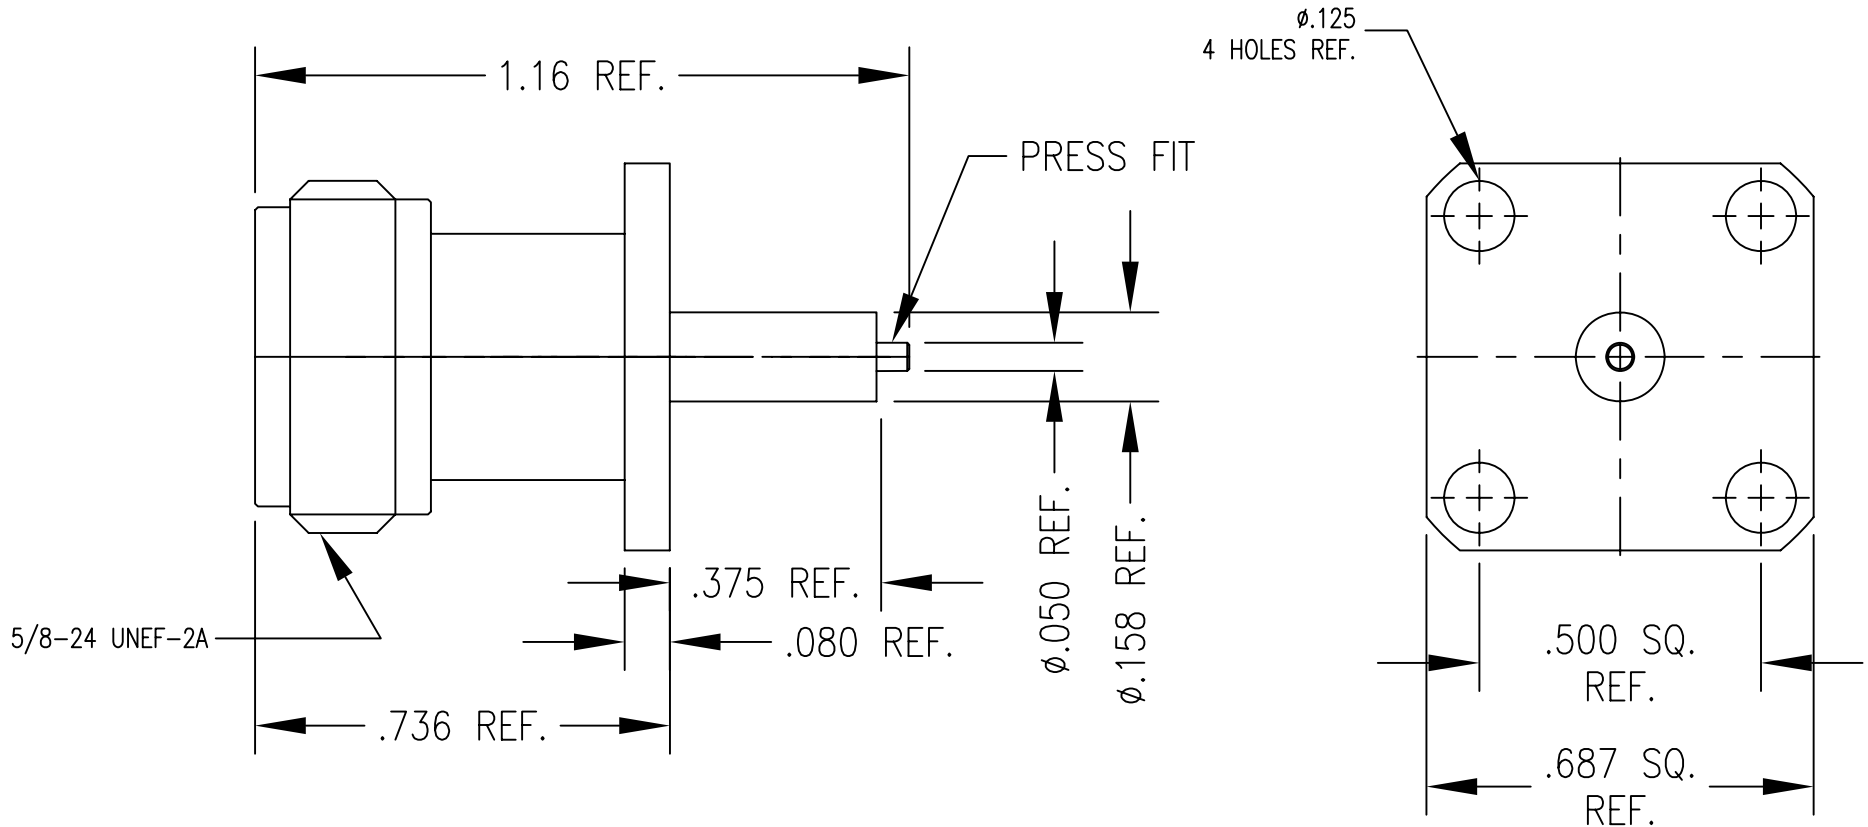

A	ORIGINAL	NEW	12/13/02						
Rev.	Revisions	Disp.	Date	Dwn.	Appd.				
		Ref.:	REMOVE ALL BURRS AND SHARP EDGES .005 MAX.	INTERPRET PER ASME Y14.5M-1994					
		SK-							

THIS DRAWING CONTAINS CONFIDENTIAL INFORMATION PROPRIETARY TO SAN-TRON, INC. IT MUST NOT BE REPRODUCED OR DISCLOSED TO OTHERS OR USED IN ANY OTHER WAY, IN WHOLE OR PART EXCEPT AS AUTHORIZED IN WRITING BY SAN-TRON, INC.

UNLESS OTHERWISE SPECIFIED:
ALL DIMENSIONS ARE IN INCHES.
ALL DIMENSIONS ARE AFTER PLATING.
.XXX = ±.005 ALL MACHINED SURFACES $\sqrt{64}$ MAX.
.XX = ±.01 ANG. ±1/2' FRACTIONAL = ±1/64

Ⓞ.004 MAX. TIR ⊥ AXIS .001

THIRD ANGLE PROJECTION

DWN	LAP	6/4/08
CHKD	SJS	12/6/02
APPR		

SAN-TRON, INC.
 4 NEWBURYPORT TPK. IPSWICH MA USA 01938
 TEL: 978-356-1585 FAX: 978-356-1573
 WWW.santron.com E MAIL: santron@santron.com

San-Tron

TITLE N PANEL RECEPTACLE, FEMALE, STRAIGHT .69 FLANGE, EXTENDED POST

MATERIAL: FINISH: SEE TABLE

CAGE CODE: 50896 DWG NO. OL-0406-228-1 REV. A

SCALE X:X