



- 1.0 PERFORMANCE
- 1.1 FREQUENCY RANGE: DC-11GHz
- 1.2 VOLTAGE RATING: 1000V RMS (sea level)
- 1.3 NOMINAL IMPEDANCE: 50 OHMS
- 1.4 DWV: 2500 V RMS @ 60 Hz (sea level)
- 1.5 TEMPERATURE RANGE: -65°C TO +165°C
- 2.0 MATERIALS
- 2.1 DIELECTRICS: PTFE


- 2.2 CONTACTS: BeCu
- 2.3 OTHER METAL PARTS: BRASS
- 3.0 FINISHES: SEE TABLE
- 4.0 MECHANICAL
- 4.1 INTERFACE IN ACCORDANCE WITH MIL-STD-348
- 4.2 ASSEMBLY INSTRUCTIONS: D-04

DWG NO. OL-0401-26-1		REV. C
PART NUMBER	BODY	CONTACT
0401-26	NICKEL	SILVER
0401-26 Ni/GOLD	NICKEL	GOLD

PLATING PER SAN-TRON SPEC. 7.3.1-8

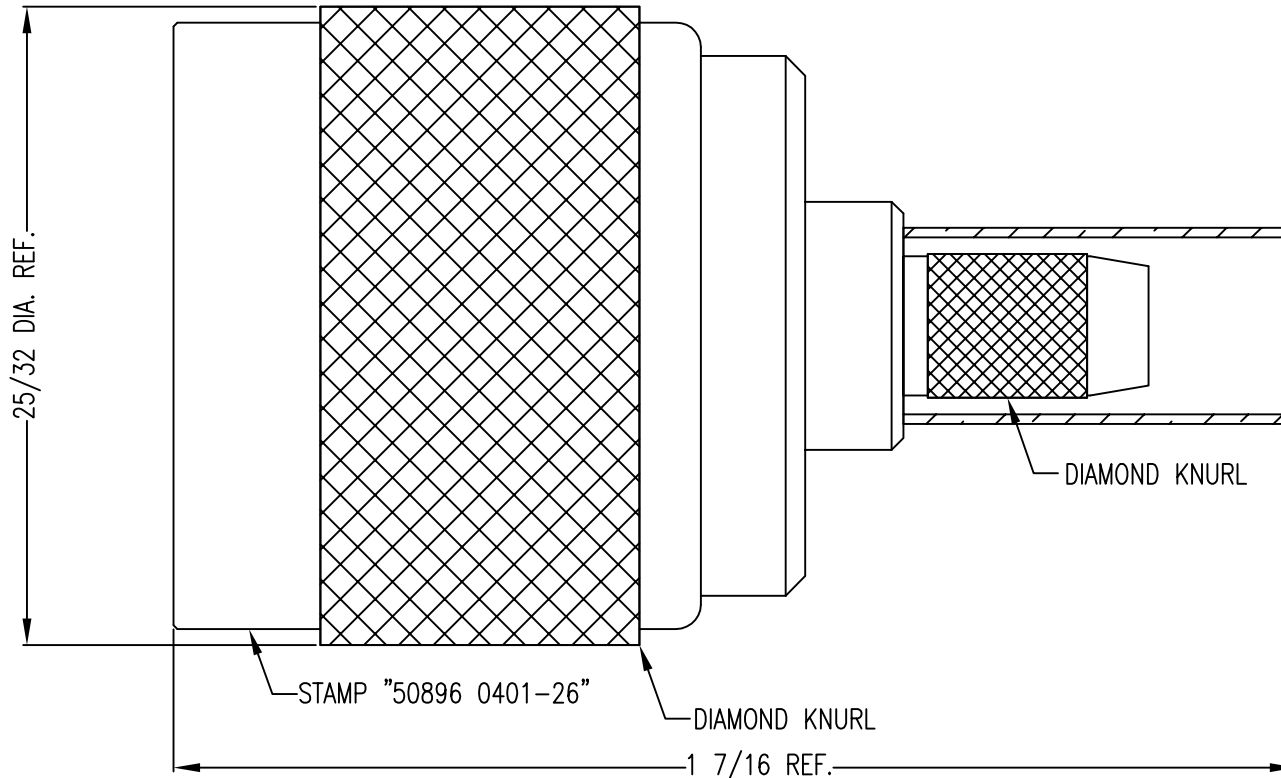

USE .231 HEX DIE  
CABLE PREPARATION DETAIL  
(NOT TO SCALE)

					PROPRIETARY THIS DRAWING CONTAINS CONFIDENTIAL INFORMATION PROPRIETARY TO SAN*TRON INC. IT MUST NOT BE REPRODUCED OR DISCLOSED TO OTHERS OR USED IN ANY OTHER WAY, IN WHOLE OR PART EXCEPT AS AUTHORIZED IN WRITING BY SAN*TRON INCORPORATED.			 SAN • TRON, INC. 4 NEWBURYPORT TPK, IPSWICH, MA 01938	
C	CRIMP HEX SIZE FROM .213 TO .231	1/9/08	JTH	FSH	REMOVE ALL BURRS AND SHARP EDGES .005 MAX. UNLESS OTHERWISE STATED ALL DIMENSIONS ARE IN INCHES AND APPLY AFTER PLATING			TITLE SERIES N CRIMP PLUG FOR RG-55,142 CABLE	
B	ADD CABLE PREP	7/17/06	FSH	FSH	UNSPECIFIED TOL. DEC. ± .005 FRAC. ± 1/64 ANG. ± 1/2°			MATERIAL: SEE NOTE 2.0	
A	ORIGINAL	2/17/98			DWN MM 2/17/98 CHKD APPR			FINISH: SEE NOTE 3.0	
Rev.	Revisions	Date	Dwn.	Appd.	RECOM. STOCK SIZE FT/M PCS QTY REQD		FSCM NO. 50896		
					CONCENTRICITY .004 TIR ALL MACHINED SUFACES ✓		DWG NO. OL-0401-26-1		
							SCALE 4:1		
							REV. C		