


REV. STATUS OF SHEETS		REV. LTR.				REVISIONS				DATE	APPROVED
SHEET NO.		LTR	DESCRIPTION								
		—	Released						12/22/91	JP	

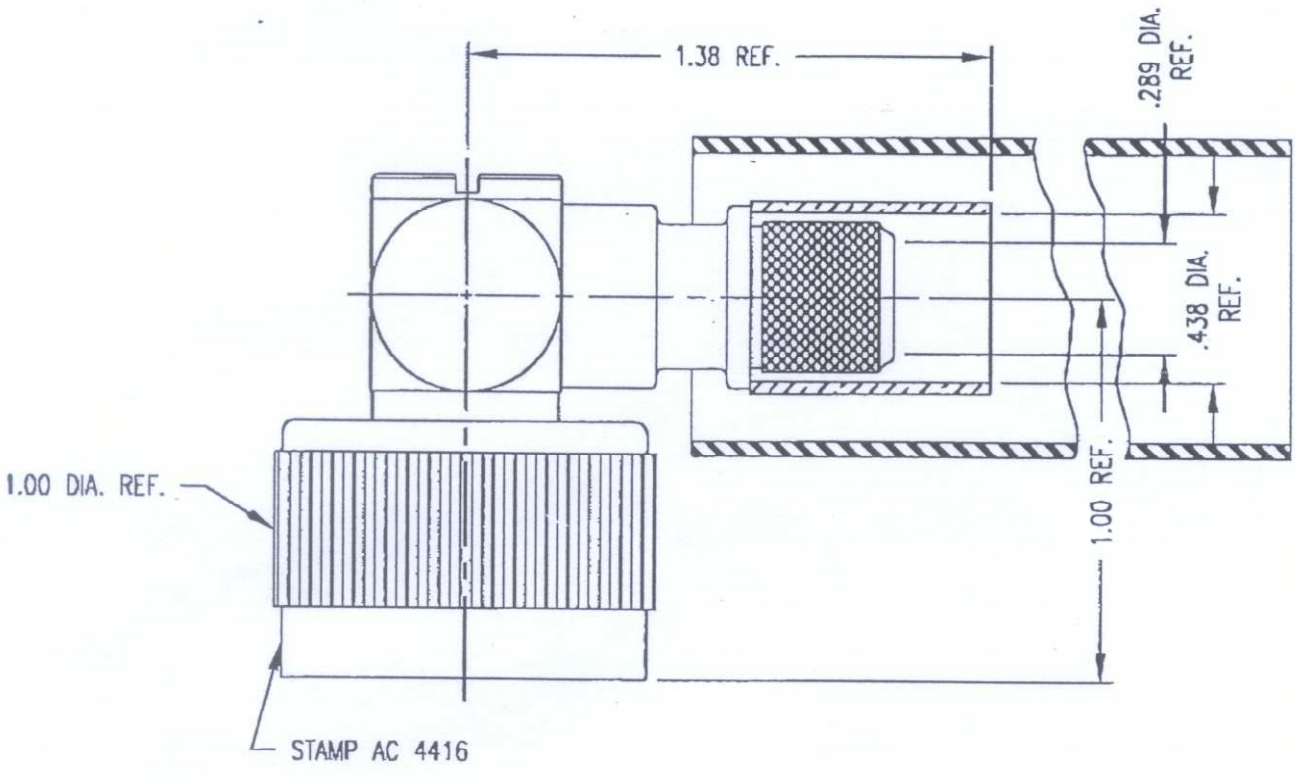

- | | |
|---|---|
| 1.0 PERFORMANCE | 2.2 GASKET: SILICON RUBBER, ZZ-R-765, GR.50-60, RED. |
| 1.1 FREQUENCY RANGE: DC-11GHz | 2.3 RETAINING RING: PHOSPHOR BRONZE, ASTM-B-159, SPRING TEMPER. |
| 1.2 VOLTAGE RATING: 1000V RMS (sea level) | 2.4 CRIMP FERRULE: CDA-122 COPPER, ASTM-B-75 |
| 1.3 NOMINAL IMPEDANCE: 50 OHMS | 2.5 ALL OTHER METAL PARTS: BRASS, ASTM-B-16 |
| 1.4 DWV: 2500 V RMS @ 60 Hz (sea level) | 2.6 HEAT SHRINK TUBE: POLYELFIN, MIL-I-23053/4, CL 3, BLACK |
| 1.5 TEMPERATURE RANGE: -65°C TO +165°C | 3.0 FINISHES |
| 2.0 MATERIALS | 3.1 CENTER CONTACT: GOLD PLATED |
| 2.1 DIELECTRIC: TEFLON, ASTM-D-1710 | 3.2 ALL OTHER METAL PARTS: NICKEL PLATED |

UNLESS OTHERWISE SPECIFIED
DIMENSIONS IN INCHES
TOLERANCES ON DECIMALS
X XX XXX
± ANGLES ± FRACTIONS
± ±

DR	
CHK	
A	PROD. MGR.
P	FLD. ENG. MGR.
P	
D	



NTR Right Angle, Crimp Plug for RG214/U Cable

SIZE A	CODE IDENT NO. 68999	DWG. NO. AC4416
SCALE	SHEET	