


**NOTES:**


21-146-1000-96

**Materials:** SST. corrosion-resistant, Non Magnetic 303, per ASTM A484 and A582. Beryllium Copper per ASTM-B-196, QQ-C-530  
 Ultem 1000  
 Oxide-Noryl (tm), MIL-P-46129

**Finish:** Center Conductors and solder components shall be plated per MIL-G-45204 Type II, Class 1 over Nickel plate per QQ-N-290.  
 Body and Body components shall be passivated per ASTM A380.

**Frequency:** DC-18 GHz  
**VSWR:** 1.20 TO 18 GHz  
**Insertion Loss:** .05√Frequency

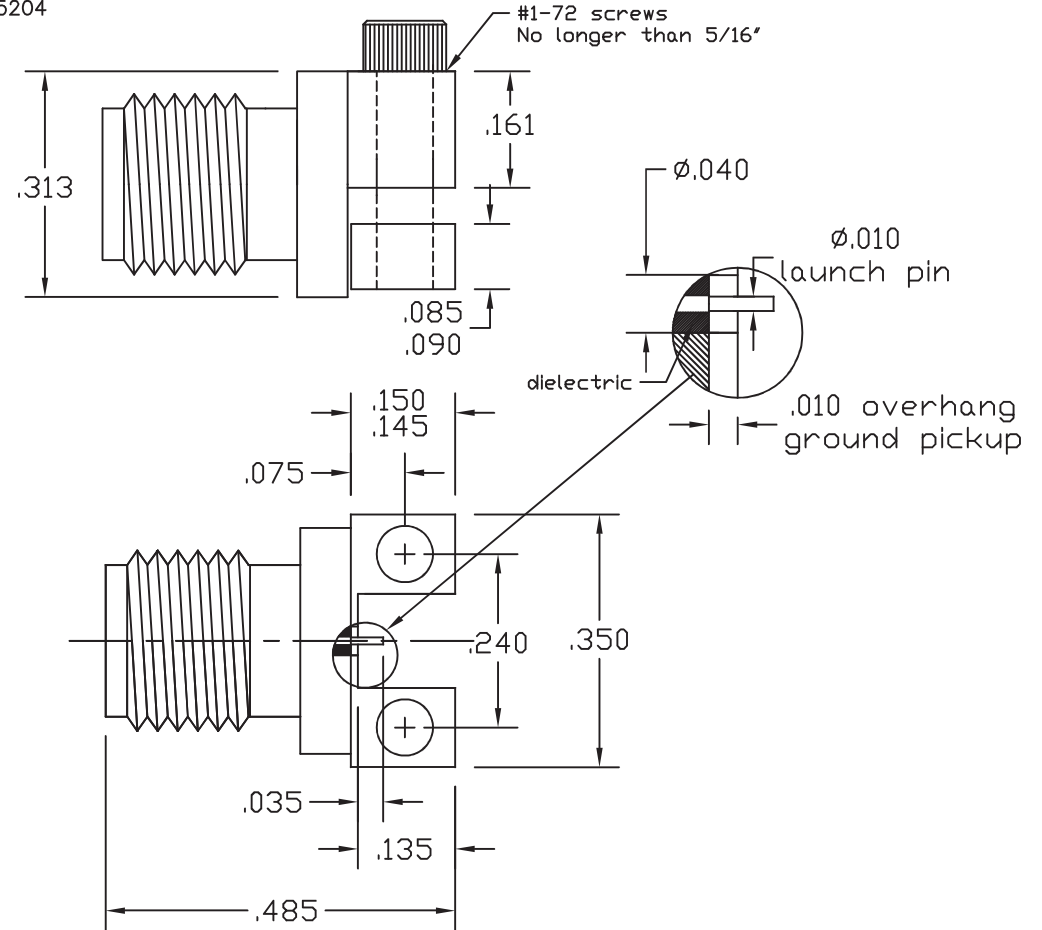

LTR	DESCRIPTION	DATE	APPR.	DRAWN <b>DRP</b>	CHECKED	USED ON	 SRI CONNECTOR GAGE CO. 3950 DOW ROAD MELBOURNE FL 32934			
-	REL	11/11		APPR.	SCALE	21-146-1000-96	TITLE			
				UNLESS OTHERWISE SPECIFIED: 1. REMOVE ALL BURRS 2. BREAK ALL CORNERS & EDGES .005 R. MAX 3. CHAMFER 1st & LAST THREADS 45° 4. SURFACE FINISHED 32/ UNLESS OTHERWISE SPECIFIED. 5. DIAMETERS ON COMMON CENTERS TO BE CONCENTRIC WITHIN .002 T.I.R. 6. ALL DIMENSIONS ARE AFTER PLATING.			SMA Jack Board Mount			
				DIMENSIONS ARE IN INCHES TOLERANCES			SIZE	FSCM NO.	SHEET	DWG. NO.
				DECIMALS	FRACTIONAL	ANGULAR	A	OHMO1	1	21-146-1000-96
				.X ±.030		.X° ±1°0'				
				.XX ±.010	± 1/64	.X'X' ±15'				
				.XXX +.005						