


***** THIS DRAWING AND ITS CONTENTS ARE THE SOLE PROPERTY OF PRECISION CONNECTOR INC. AND ARE SUBJECT TO CHANGE WITHOUT NOTICE UNLESS OTHERWISE SPECIFIED *****

REV.	DESCRIPTION	DATE	BY	APPVD
A	INITIAL RELEASE	07/19/11	MJK	MJK

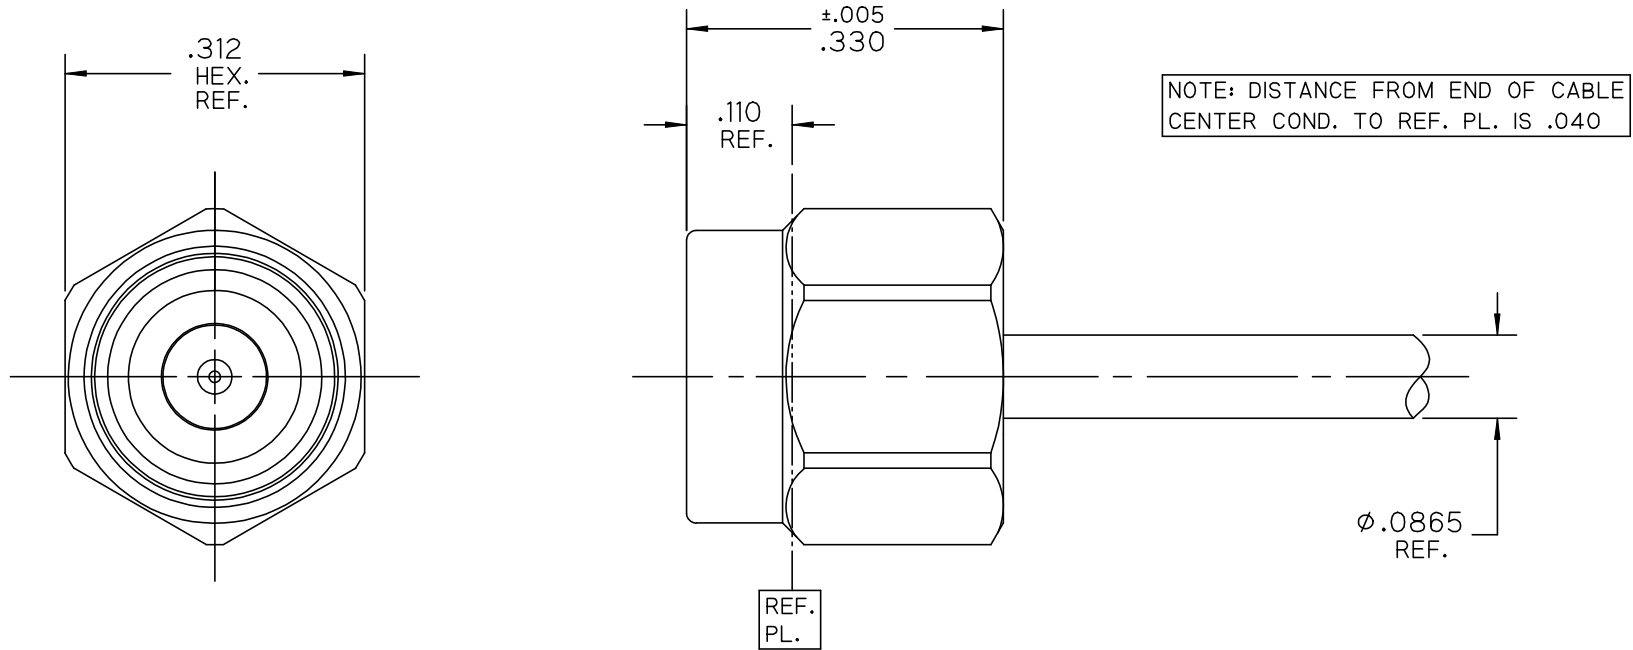

NOTES :

1.0 MATERIALS:

- 1.1 BODY & CENTER CONTACT: BERYLLIUM COPPER PER ASTM-B196, UNS C17300.
- 1.2 COUPLING NUT: STEEL, CORROSION RESISTANT PER ASTM-A582, UNS NO. S30300.
- 1.3 LOCK RING: BERYLLIUM COPPER PER ASTM-B197, UNS C17200.
- 1.4 INSULATOR(S): PTFE FLUOROCARBON PER ASTM-D1710.
- 1.5 GASKET: SILICONE RUBBER PER A-A-59588.

2.0 FINISHES:

- 2.1 BODY & CENTER CONTACT: GOLD PLATE PER ASTM-B488, 50 MICROINCHES MIN. THK. OVER ELECTROLYTIC NICKEL PLATE PER ASTM-B689, 50 MICROINCHES MIN. THK.
 - 2.2 COUPLING NUT: PASSIVATE PER SAE-AMS-2700.
 - 2.3 GASKET, LOCK RING & DIELECTRICS: NONE.
- 3.0 INTERFACE PER PCI-SMAP-HF.



TOLERANCES UNLESS OTHERWISE SPECIFIED		DRAWN BY: MJK		PART DESCRIPTION: SMA PLUG, DIRECT SOLDER FOR RG-405 CABLE. LOW PROFILE			
		DATE: 07/19/11					
.XX	± .02	CAGE CODE		SCALE	SHEET NO.	DRAWING NUMBER	REV
.XXX	± .005	4MJR5		5:1	1 OF 1	3622-0L	A
.XXXX	± .0005						
ANGLES	± 2°						