

SMA3100-L240	SMA Plug Crimp	50Ω
<p style="text-align: center;"> 8 HEX (.315 HEX) </p> <p style="text-align: center;"> 18.65 (.734) </p> <p style="text-align: center;"> ø3.9 (ø.154) </p> <p style="text-align: center;"> ø5.6 (ø.220) </p>		
Parts	Material	Plating(Micro-inch)
Ferrule	Brass	Gold 5 Over Nickel 50 Over Copper 50
Contact Pin	Brass	Gold 20 Over Nickel 50 Over Copper 50
Renber Ring	Beryllium Copper	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Gasket	Silicon	
Insulator	Teflon	
Body	Brass	Gold 5 Over Nickel 50 Over Copper 50
Coupling Nut	Brass	Gold 5 Over Nickel 50 Over Copper 50
Weight: 4.45 g Suitable Cables: LMR240, JBY240		

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

CABLE ASSEMBLY INSTRUCTION

SMA3100-L240

JYE BAO CO., LTD.
TAIPEI TAIWAN R.O.C

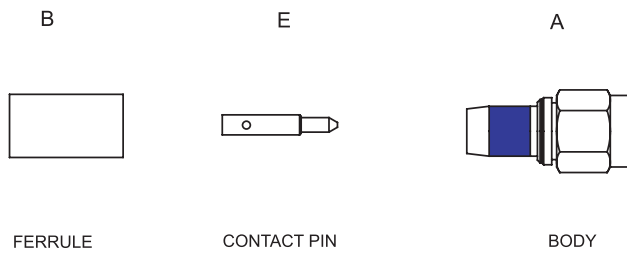


DIAGRAM	ASSEMBLY INSTRUCTION
	<p>Step 1: STRIP</p>
	<p>Step 2: SLIDE FERRULE 'B' OVER CABLE.</p> <p>Step 3: PUT PIN 'E' ON CENTER CONDUCTOR AND SOLDER IN "Y".</p>
	<p>Step 4: LOOSEN BRAIDING AND SLIDE CONNECTOR 'A' IN PLACE.</p>
	<p>Step 5: SLIDE FERRULE 'B' TOWARDS THE CONNECTOR 'A' AND CRIMP.</p>

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.