


7325-1512-050

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
-	INITIAL RELEASE	02/04/98	D.N.

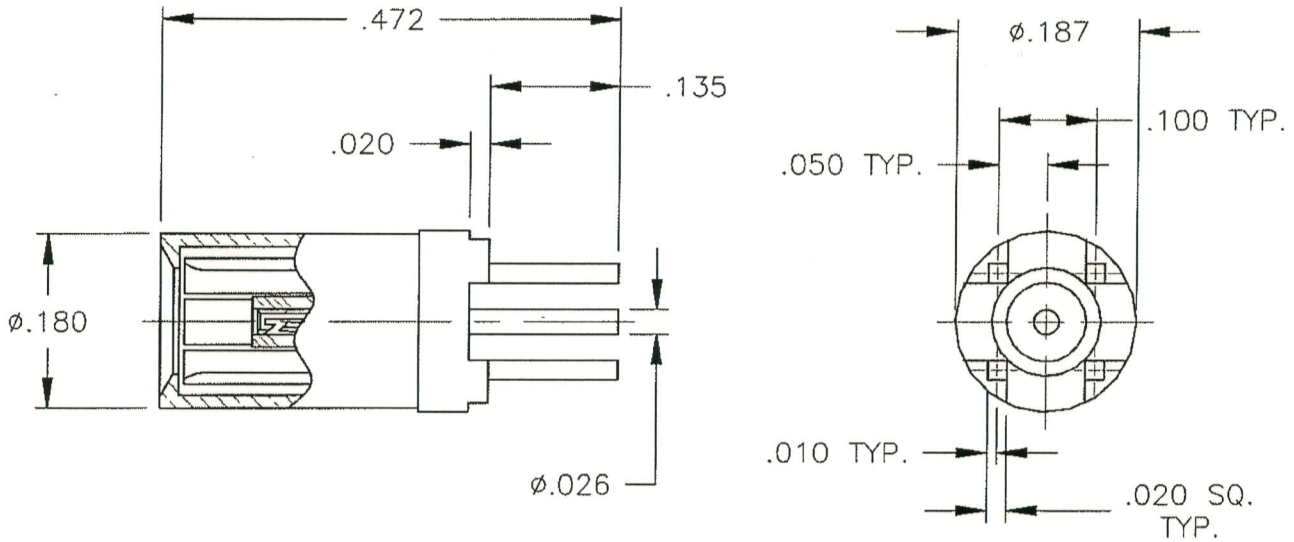

NOTES: CONFORMS TO MIL-PRF-39012

MATERIAL:

1. BODY & CONTACT = BERYLLIUM COPPER PER ASTM B196, ALLOY C17300, TEMPER TD04.
2. INSULATOR = TEFLON, VIRGIN WHITE PER ASTM D1710, GRADE 1, TYPE I, CLASS "A".
3. SLEEVE = BRASS PER ASTM B16, ALLOY C36000, TEMPER H02.

FINISHES:

1. CONTACT = GOLD PLATE PER MIL-G-45204, TYPE II, CLASS 1, GRADE C OVER $.00010$ TO $.00020$ STRESS FREE SULFAMATE NICKEL PER QQ-N-290.
2. ALL OTHER METAL PARTS = GOLD PLATE PER MIL-G-45204, TYPE II, CLASS 0, GRADE C OVER $.00010$ TO $.00020$ COPPER STRIKE PER MIL-C-14550.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON

DWN: D.N. DATE 02/02/98



APPLIED ENGINEERING PRODUCTS

104 John W. Murphy Dr.
New Haven, CT 06513

DECIMAL	FRAC	ANGLE
	$\frac{1}{64}$	$\pm 2^\circ$

CHKD: M.S. DATE 02/04/98

APVD: C.T. DATE 02/04/98

SSLB SLIDE-ON STRAIGHT P.C. BOARD PLUG

MATERIAL: SEE NOTES

FINISH: SEE NOTES

SIZE	FSCM NO.	DWG NO.	REV
A	19505	7325-1512-050	-
SCALE 5:1		CADFILE 7325-1512-050	SHEET 1 OF 1

FORM 2

7325-1512-050