


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	11/28/11	D.N.



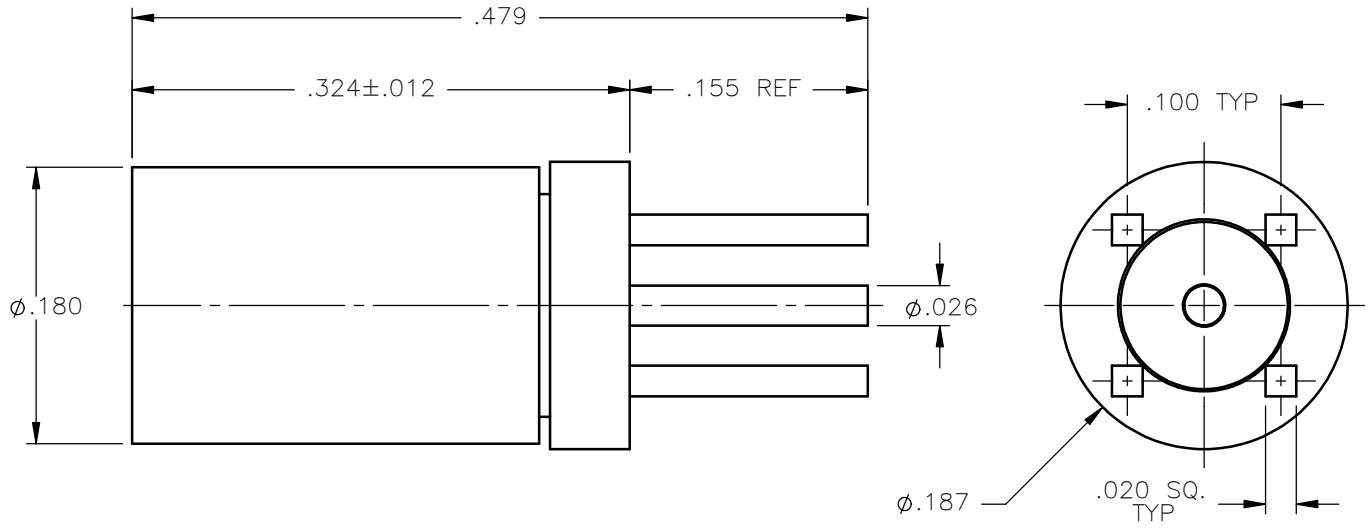

NOTES:

MATERIALS:

1. BODY & CONTACT = BERYLLIUM COPPER PER ASTM B196, ALLOY C17300, TEMPER TD04.
2. INSULATOR = VIRGIN WHITE TEFLON PER ASTM D1710, GRADE 1, TYPE I, CLASS "B".
3. SLEEVE = BRASS PER ASTM B16, ALLOY C36000, TEMPER H02.

FINISHES:

1. BODY & SLEEVE = GOLD PLATE PER MIL-G-45204, TYPE II, CLASS 0, GRADE C, OVER  $.00010$  TO  $.00020$  COPPER STRIKE PER MIL-C-14550.
2. CONTACT = GOLD PLATE PER MIL-G-45204, TYPE II, CLASS 1, GRADE C, OVER  $.00010$  TO  $.00020$  STRESS FREE SULFAMATE NICKEL PER QQ-N-290.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON	DWN: DATE	 <b>Property of Radiall</b> This document cannot be reproduced or communicated to a third party without prior written permission of RADIALL.			
	D.N. 11/28/11				
DECIMAL	ANGLE	CHKD: DATE	<b>SSLB STRAIGHT FEMALE PLUG P.C.B. MOUNT RECEPTACLE</b>		
		J.S. 11/28/11			
		APVD: DATE			
		J.M. 11/28/11			
REFERENCE:	MATERIALS & FINISHES:	SIZE	FSCM NO.	DWG. NO.	REV
ORIGINATED: D.N. DATE: 11/28/11	SEE NOTES	A	19505	7325-1512-000	A
		SCALE 8:1	THIRD ANGLE PROJECTION		SHEET 1 OF 1

7325-1512-000