


\*\*\*\*\* THIS DRAWING AND ITS CONTENTS ARE THE SOLE PROPERTY OF PRECISION CONNECTOR INC. AND ARE SUBJECT TO CHANGE WITHOUT NOTICE UNLESS OTHERWISE SPECIFIED \*\*\*\*\*

REV.	DESCRIPTION	DATE	BY	APPVD
A	INITIAL RELEASE	08/03/10	RDE	MJK

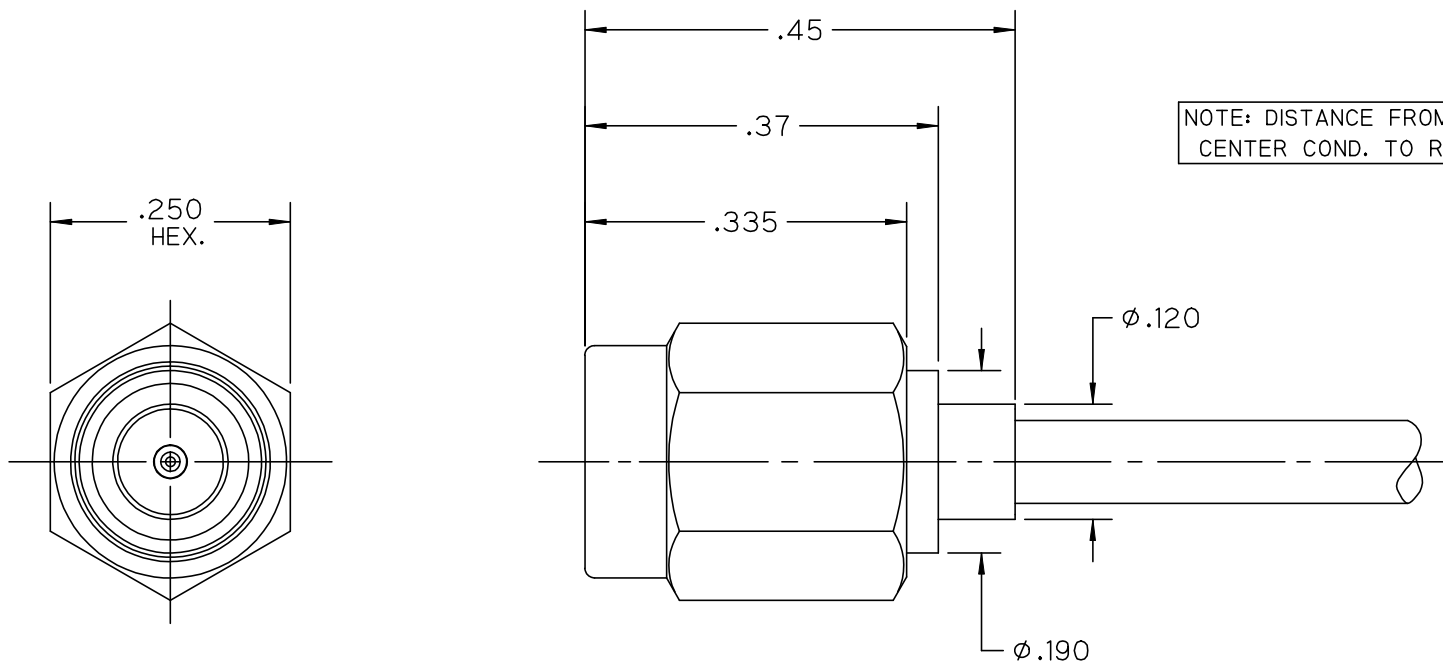

NOTES :

1.0 MATERIALS:

- 1.1 COUPLING NUT: STEEL, CORROSION RESISTANT PER ASTM-A582, UNS NO. S30300.
- 1.2 BODY & CENTER COND.: BERYLLIUM COPPER PER ASTM-B196, UNS C17300.
- 1.3 LOCK RING: BERYLLIUM COPPER PER ASTM-B197, UNS C17200.
- 1.4 GASKET: SILICONE RUBBER PER A-A-59588.
- 1.5 INSULATOR: PTFE FLUOROCARBON PER ASTM-D1710.

2.0 FINISHES:

- 2.1 BODY & CENTER CONTACT: GOLD PLATE PER ASTM-B488, 50 MICROINCHES MIN. THK. OVER ELECTROLYTIC NICKEL PLATE PER ASTM-B689 50 MICROINCHES MIN. THK.
- 2.2 COUPLING NUT: PASSIVATE PER SAE-AMS-2700.
- 2.3 GASKET, LOCK RING & DIELECTRIC: NONE.



TOLERANCES UNLESS OTHERWISE SPECIFIED	DRAWN BY: RDE	PART DESCRIPTION: SSMA PLUG, DIRECT SOLDER FOR RG-405 CABLE			
	DATE: 08/03/10	CAGE CODE	SCALE	SHEET NO.	DRAWING NUMBER
.XX ± .02	4MJR5	5:1	1 OF 1	3207-0L	REV
.XXX ± .005					A
.XXXX ± .0005					
ANGLES ± 2°					