



THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES,
 ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED
 WITHOUT WRITTEN PERMISSION FROM RF INDUSTRIES.
 ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.

ALL DIMENSIONS ARE REFERENCE ONLY



PART NO.		RFT-1217-X		
REV	DESCRIPTION	DWN	DATE	APPROVED
A	ENGINEERING RELEASE	PB	3/8/93	J. BENZ
B	CHANGE BODY TO PRESS FIT	KMM	9/20/94	R. RICE
C	CHANGE BODY DESIGN & STRIPING DIMENSIONS	CZS	8/20/00	C. ZUNIGA



SUGGESTED CRIMP DIE: .255



SUGGESTED CRIMP DIE: .068

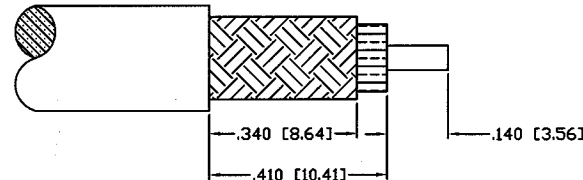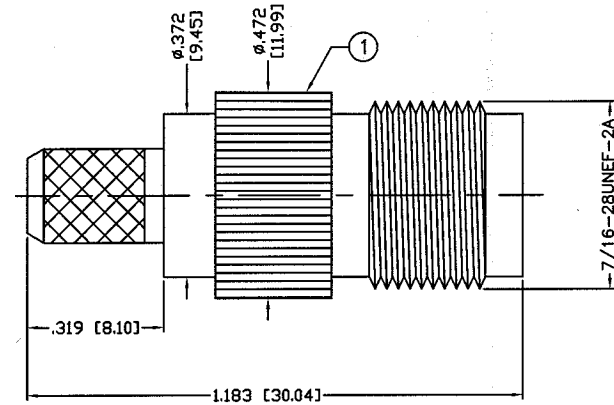

RECOMMENDED STRIPPING INSTRUCTIONS

SPECIFICATIONS:

IMPEDANCE: 50 Ohms
 FREQUENCY RANGE: 0-11 GHz
 WORKING VOLTAGE: 500 Vrms
 INSULATION RESISTANCE: 5k M ohms min.
 TEMPERATURE RANGE: -65°C TO +165°C
 FOR RG-8/X, BELDEN 9258, MAXRAD M8X-100 &
 M8X-1000, MICRO 8/U, REMEE 1600, SAXTON 8315 &
 TIMES LMR-240 & LMR-240 ULTRAFLEX CABLE

1	BODY	1	BRASS	NICKEL, 100μ"
2	INSULATOR	1	DELTRIN	---
3	CONTACT	1	BRASS	GOLD, 3 μ"
4	FERRULE	1	BRASS	NICKEL, 100μ"
5	PRESS WASHER	1	BRASS	NICKEL, 100μ"
6				
7				
8				
9				
10				
11				
12				
13				
14				
#	DESCRIPTION	QTY	MATERIAL	FINISH

000494	
DRAWN C. ZUNIGA	8/20/00
CHECKED <i>[Signature]</i>	<i>[Signature]</i>
ORJ DRAWN C. ZUNIGA	3/8/93
APPROVALS	DATE

UNLESS OTHERWISE SPECIFIED:
 1. REMOVE ALL BURRS
 2. BREAK ALL CORNERS & EDGES .005 R. MAX.
 3. CHAMFER 1ST & LAST THREADS 45°
 4. SURFACE ROUGHNESS 63 FINISH MIL-STD-10
 5. DIAMETERS ON COMMON CENTERS TO BE CONCENTRIC WITHIN .002 T.I.R.
 6. ALL DIMENSIONS ARE AFTER PLATING.

DIMENSIONS ARE IN INCHES AND [MILLIMETERS]
 UNLESS OTHERWISE NOTED TOLERANCES ARE:
 DECIMALS DIAMETER
 .xxx±.003 [.08] .xxx±.001 [.03]
 .xx±.005 [.13] .xx±.003 [.08]

RF connectors
 DIVISION OF RF INDUSTRIES, LTD.

7610 MIRAMAR RD
 SAN DIEGO, CA 92126
 (858) 549-6340
 (858) 549-6345 FAX

TNC JACK, CRIMP

SIZE A	CABLE GROUP X	DWG NO. RFT-1217-X	REV C
SCALE: NTS		CAD FILE OUTLINE	SHEET 1 OF 1