

NOTICE OF PROPRIETARY RIGHTS
THIS DOCUMENT CONTAINS CONFIDENTIAL TECHNICAL DATA, INCLUDING TRADE SECRETS, PROPRIETARY TO
TIMES MICROWAVE SYSTEMS. DISCLOSURE OF THIS DATA IS EXPRESSLY CONDITIONED UPON YOUR ASSENT THAT ITS USE IS LIMITED TO USE WITHIN
YOUR COMPANY ONLY. ANY OTHER USE IS STRICTLY PROHIBITED WITHOUT THE PRIOR WRITTEN CONSENT OF TIMES MICROWAVE SYSTEMS.

MYZ	REVISION DESCRIPTION			DFTM	DATE	APPD	DATE
A	RELEASED	FOR	PRODUCTION	n.n.n	1/13/14	J.D.B.	1/13/14



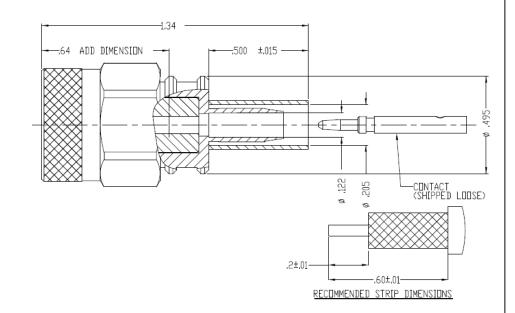

## NOTES:

- ASSEMBLED CONNECTOR INTERFACE IS DESIGNED TO MATE WITH STANDARD QMA JACK,

L: BODY, CONTACT, COUPLING SLEEVE - BRASS PER ASTM B16, C36000 ALLOY, TEMPER H02 INSULATOR - TEFLON PER ASTM D1710, TYPE 1, GRADE 1, CLASS A SHRINK SLEEVE - HEAT SHRINKABLE ATUM PER MIL-I-23053/4 (NOT SHOWN) CRIMP SLEEVE - D.H.P. COPPER CDA, ALLOY #122, TEMPER HARD FINGERS - BERYLLIUM COPPER PER ASTM B196, C17300 ALLOY, CONDITION HT

FINISH:

CONTACT - GOLD PLATE PER ASTM B488 ALL OTHER METAL PARTS - SILVER PLATE PER ASTM B700

MATL:	UNLESS OTHERWISE SPECIFIED	DFTM. N. N. N	TIMES MISDOUAVE SYSTEMS						
1	ALL DIMENSIONS ARE IN INCHES MACHINED SURFACES FINISH 63 RMS MAX.	DATE 1/13/14	TIMES MICROWAVE SYSTEMS						
	REMOVE ALL BURRS . 004 MAX. BREAK MACHINE CORNERS . 005 MAX. FILLET R.	CHKD. J. D. B.	TC-195-TM-X						
USED DN: A	TOLERANCES ON DECIMALS . XX ± .01	DATE 1/13/14	CONNECTOR ASSEMBLY						
	ANGLES ± 1° FRACTIONS ± 1/64	APPD. J. D. B.	TNCM for LMR-195						
SCALE: NONE DWG. A	DO NOT SCALE DRAWING CODE 68999	DATE 1/13/14	P   1 of 1  SD3190-2879						