
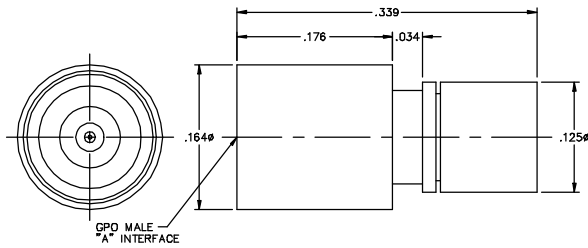


DATE REVISED: 9/21/04

CATALOG NUMBER	"A" INTERFACE
A055-A14-02	LIMITED DETENT
A055-A15-02	SMOOTH BORE

MATERIAL AND FINISH

CENTER CONTACT, END BeCu: GOLD PLATE 50-100 MICRONS
 CAP AND HOUSING: OVER NICKEL PLATE 50 MICRONS MIN.
 DIELECTRIC: VIRGIN PTFE
 MAX. AVERAGE POWER: .25 WATTS



This drawing and any data contained herein is the property of Corning Gilbert Inc., and constitutes and contains proprietary and confidential information. Neither receipt nor possession of this drawing confers or transfers any right to duplicate, use or disclose any information contained herein except as expressly authorized by Corning Gilbert Inc.

GPO MALE LOAD FIELD GRADE TERMINATION (TAB DETENT)	IDENT CODE: 82316	Corning Gilbert Inc.
	REVISION: F	
SOURCE FILE: SK-1862	DWG. NO.: OL-A055-A1X-02	ASSY. PROC.: -