


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
-	INITIAL RELEASE	12/07/98	D.N.
A	ECO #2878	12/22/98	D.N.
B	ECO #5611	03/02/05	A.D.M.

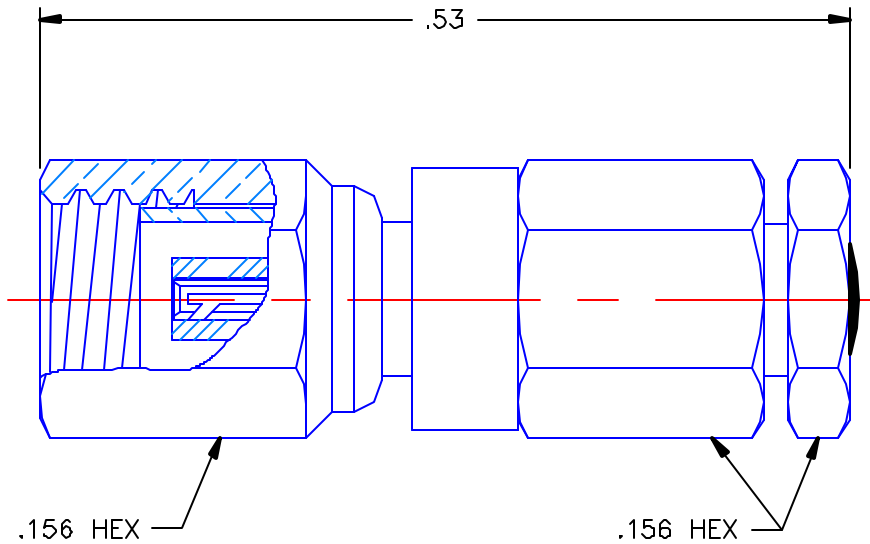

PROPRIETARY INFORMATION
 NOT TO BE RELEASED
 WITHOUT WRITTEN PERMISSION
 FROM AN AUTHORIZED
 REPRESENTATIVE OF
 APPLIED ENGINEERING PRODUCTS


NOTES:

MATERIALS:

1. CONTACT, BODY & CRIMP NUT = BERYLLIUM COPPER PER ASTM B196, ALLOY C17300, TEMPER TDD4.
2. INSULATORS = VIRGIN WHITE TEFLON PER ASTM D1710, GRADE 1, TYPE I, CLASS "A".
3. ALL OTHER METAL PARTS: BRASS PER ASTM B16, ALLOY C36000, TEMPER H02.
4. RESISTOR = 1/8 WATT, 47 OHM HOT MOLDED CARBON FIXED RESISTOR.

FINISHES:

1. CONTACT = GOLD PLATE PER MIL-G-45204, TYPE II, CLASS 1, GRADE C, OVER .00010 TO .00020 STRESS FREE SULFAMATE NICKEL PER QQ-N-290.
2. ALL OTHER METAL PARTS = GOLD PLATE PER MIL-G-45204, TYPE II, CLASS 0, GRADE C, OVER .00010 TO .00020 COPPER STRIKE PER MIL-C-14550.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON	DWN:	DATE	 APPLIED ENGINEERING PRODUCTS 104 John W. Murphy Dr New Haven, CT 06513
	D.N.	12/04/98	
DECIMAL	ANGLE	CHKD:	SSMC STRAIGHT FEMALE 50 OHM RESISTIVE TERMINATION
		G.A.T.	
		APVD:	SIZE A FSCM NO. 19505 DWG NO. 7036-1511-051 REV B
		G.L.	SCALE 8:1 CODE SHEET 1 OF 1
REFERENCE:	MATERIAL & NOTES:		
ORIGINATOR: D.N. DATE: 12/04/98	SEE NOTES		

7036-1511-051