


NOTES:

43-210-5010-25

Materials: SST. corrosion-resistant, Non Magnetic 303, per ASTM A484 and A582. Beryllium Copper per ASTM-B-196, QQ-C-530
XXXXXXXXXXXXX

Finish: Center Conductors and solder components shall be plated per MIL-G-45204 Type II, Class 1 over Nickel plate per QQ-N-290.
Body and Body components shall be plated Nickel Per QQ-N-290 Class II

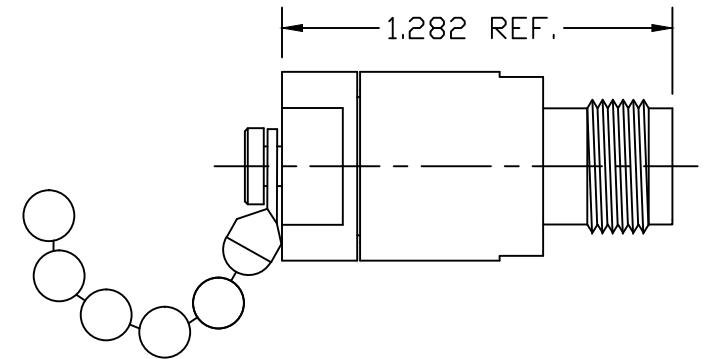

LTR	DESCRIPTION	DATE	APPR.	DRAWN LMW	CHECKED	USED ON	SRI CONNECTOR GAGE CO. 751 NORTH DRIVE MELBOURNE FL. 32934			
-	REL			APPR.	SCALE	43-210-5010-25	TITLE TNC TERMINATION			
				UNLESS OTHERWISE SPECIFIED: 1. REMOVE ALL BURRS 2. BREAK ALL CORNERS & EDGES .005 R. MAX 3. CHAMFER 1st & LAST THREADS 45° 4. SURFACE FINISHED 32√ UNLESS OTHERWISE SPECIFIED. 5. DIAMETERS ON COMMON CENTERS TO BE CONCENTRIC WITHIN .002 T.I.R. 6. ALL DIMENSIONS ARE AFTER PLATING.					FINISH	
				DIMENSIONS ARE IN INCHES TOLERANCES			SIZE	FSCM NO.	SHEET	DWG. NO.
				DECIMALS	FRACTIONAL	ANGULAR	A	OHMO1	1	43-210-5010-25
				.X ±.030		.X° ±1°0'				
				.XX ±.010	± 1/64	.X'X' ±15'				
				.XXX +.005						