
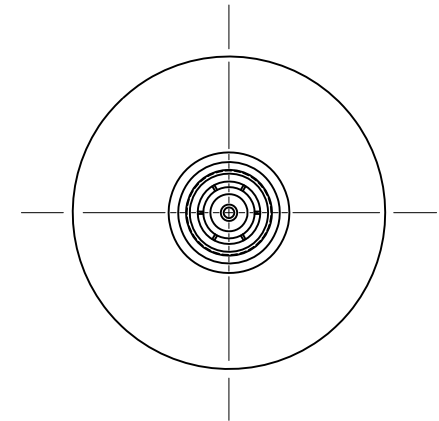
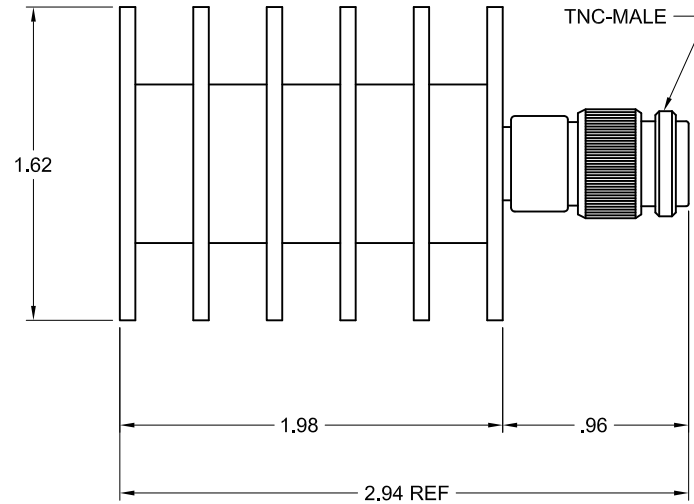


ELECTRICAL SPECIFICATIONS

FREQUENCY: DC - 6.000 GHz
 IMPEDANCE (NOM): 50 OHMS
 VSWR (MAX):
 DC - 2.000 GHz: 1.10 : 1
 2.000 - 4.000 GHz: 1.20 : 1
 4.000 - 6.000 GHz: 1.30 : 1
 POWER (AVG): 35 WATTS
 (PEAK): 5 kWATTS


MECHANICAL SPECIFICATIONS

CONNECTOR: TNC-MALE, BRASS, ALBALOY PLATE
 TNC-MALE PIN: BRASS, SILVER PLATE
 BODY, HEAT SINK: ALUMINUM, BLACK ANODIZE
 INSULATOR: PTFE, VIRGIN ELECTRICAL GRADE
 OPERATING TEMPERATURE: -55°C TO +85°C
 WEIGHT: 4.09oz

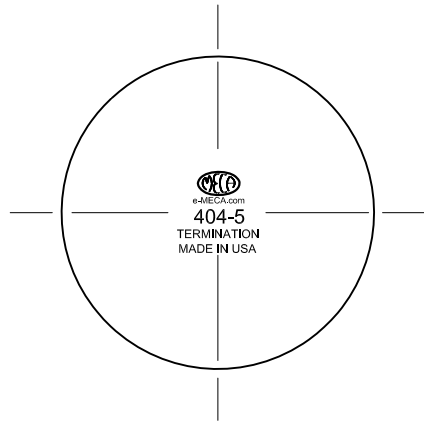

C	PG	SEE DCN # 110531-01	06/01/11	JT	RR
LTR	PG	DESCRIPTION	DATE	DR	APP

MATERIAL: SEE ABOVE		UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES	
FINISH: SEE ABOVE		TOLERANCES 2 PLACES: ±.02 3 PLACES: N/A ANGLES: N/A	
DRAWN: RWA	DATE: 04/09/02	TIR: N/A	
APPROVED: MJD	DATE: 04/09/02	SCALE: NTS	SIZE
		SHEET: 1 OF 1	A

 ELECTRONICS, INC. DENVER, NEW JERSEY e-MECA.com		TITLE	
		TERMINATION, 50 OHMS, 35 WATTS, TYPE TNC-MALE	
CODE IDENT. NO.	DRAWING NO.	REV	
22424	404-5	C	