
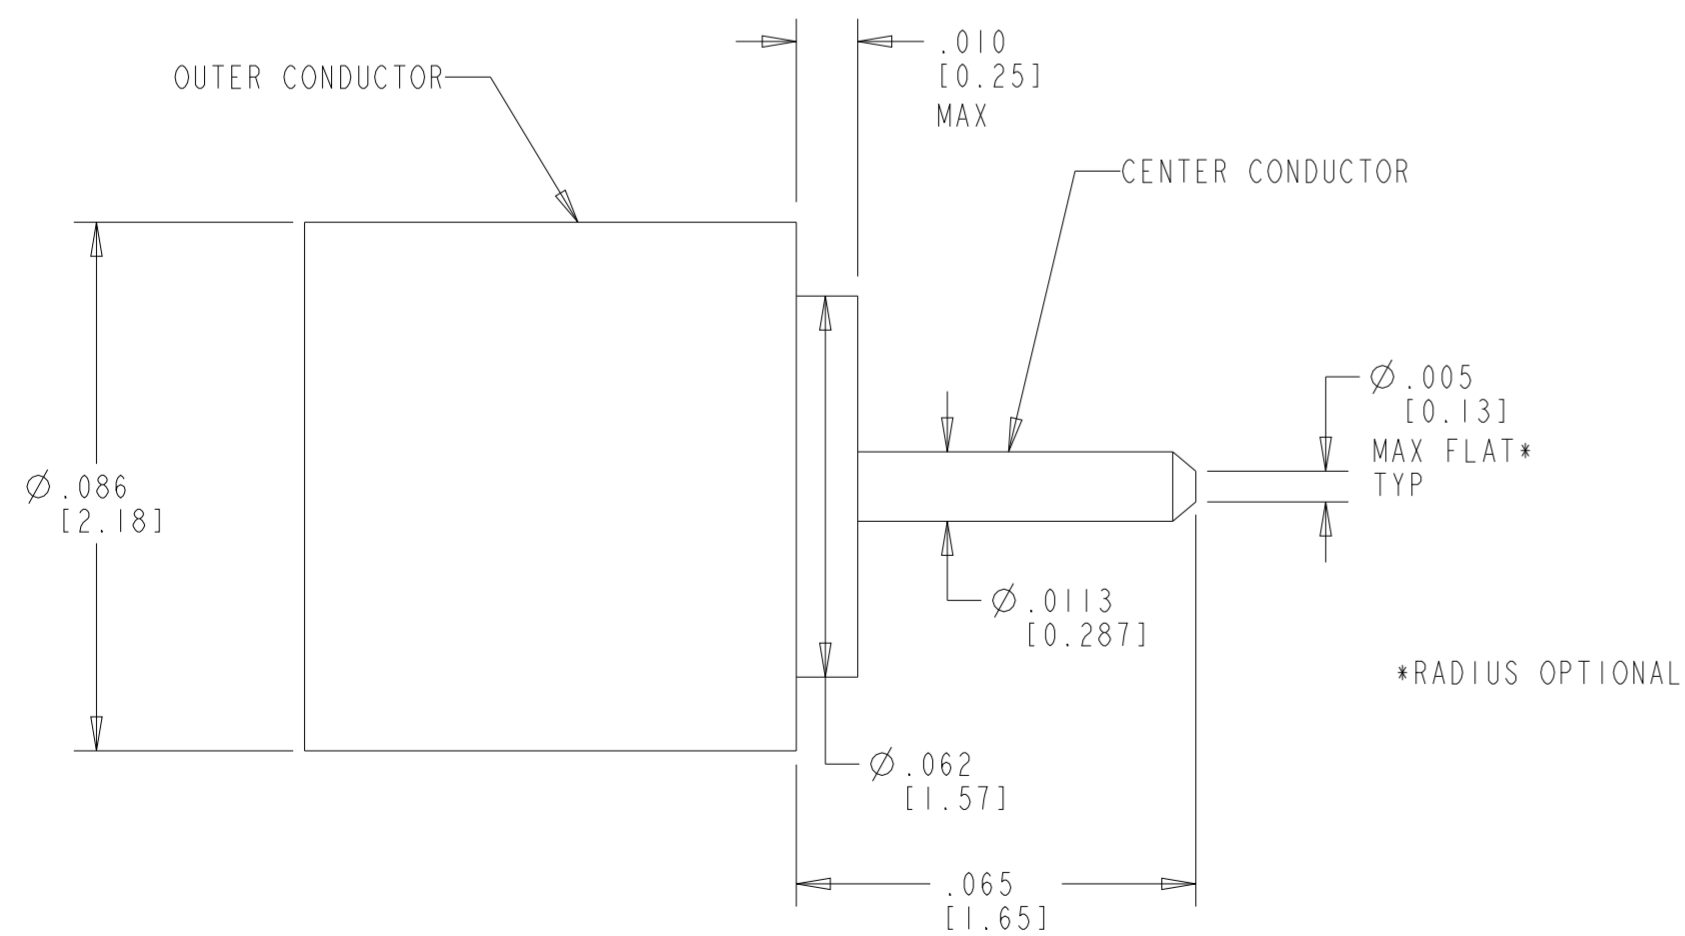
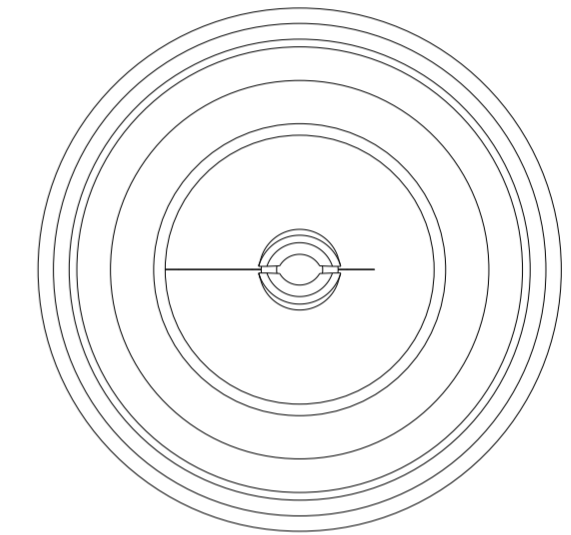


P	LTR	DESCRIPTION	DATE	DWN	APVD
A		RELEASE PER ECN-23-233244	29SEP2023	LS	FB

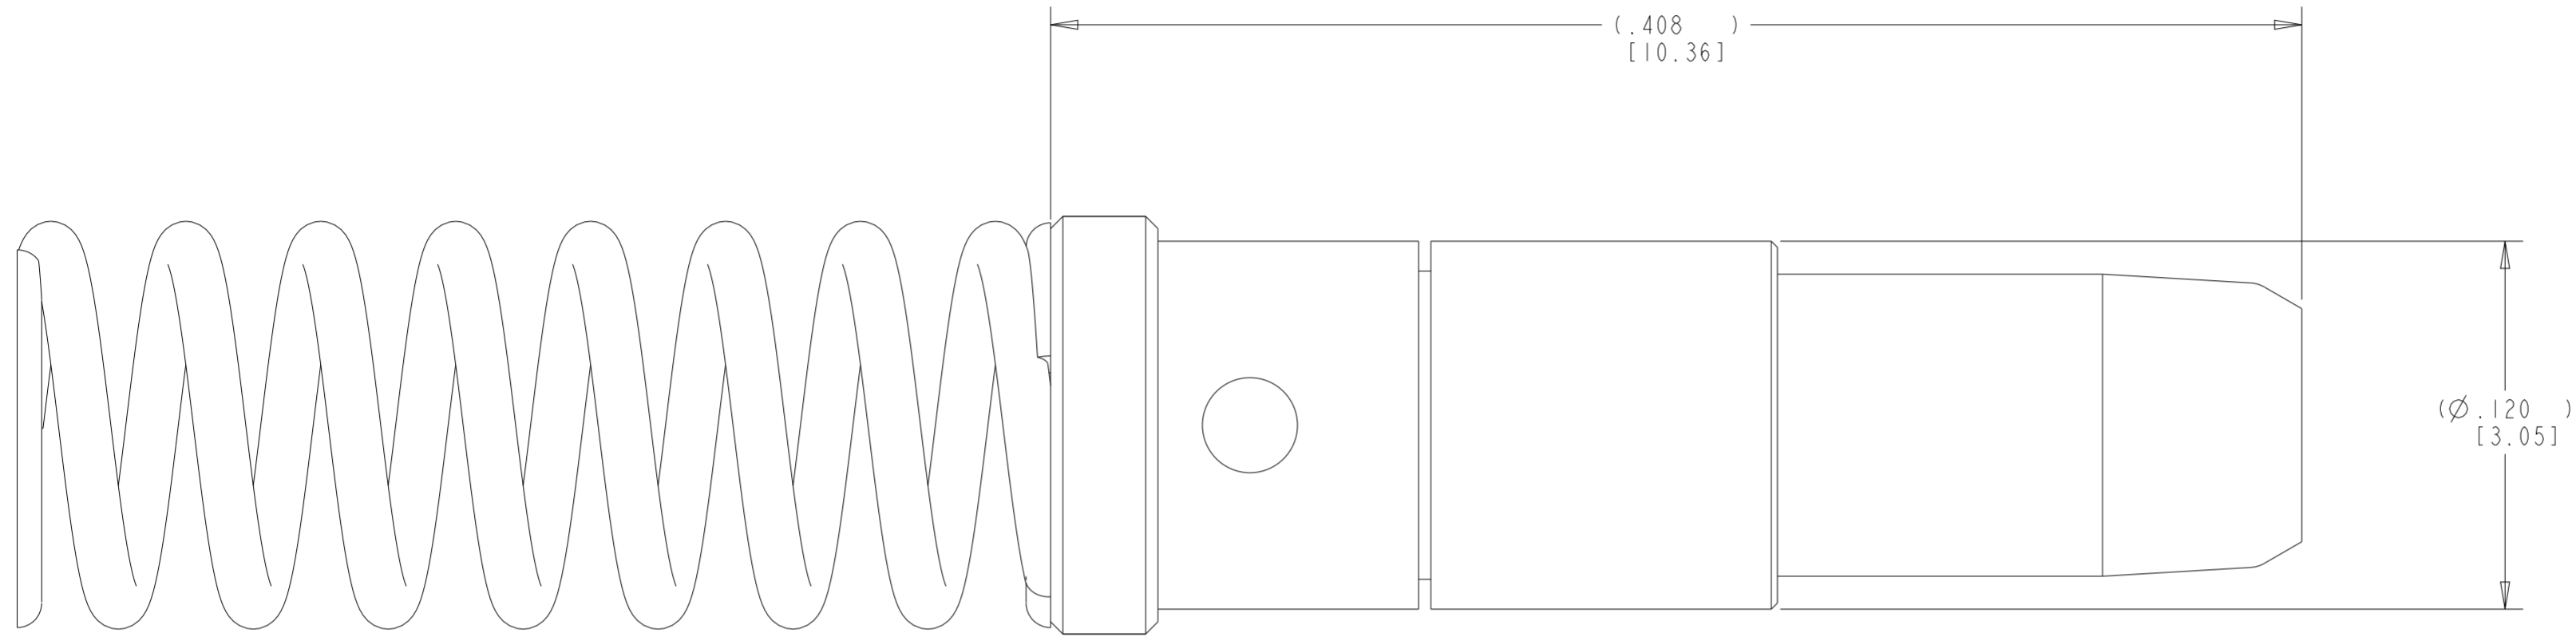

- 1 MATERIAL:
BODY AND CENTER CONTACT: COPPER ALLOY
INSULATOR: TEFLON (PTFE)
SPRING: STAINLESS STEEL
- 2 FINISH: FRONT BODY AND CENTER CONTACT: 50-90 μIN GOLD PLATE OVER NICKEL
REAR BODY: 3-15 μIN GOLD PLATE OVER NICKEL
- 3. SPRING IS SHIPPED LOOSE FROM CONTACT ASSEMBLY

SCALE 32:1
CABLE PREPARATION FOR Ø.086, 75 OHM
SEMI-RIGID OR CONFORMABLE CABLE

2401218-1
PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	09FEB2022	
DIMENSIONS:		CHK	L SIPE	
i n		APVD	-	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC	-	
0 PLC ±-		APPLICATION SPEC	-	
1 PLC ±-		WEIGHT	-	
2 PLC ±-		CUSTOMER DRAWING	-	
3 PLC ±.001[0.03]		SCALE	20:1	
4 PLC ±-		SHEET	1 OF 1	
ANGLES ±-		REV	A	
FINISH		NAME: PIN CONTACT ASSEMBLY, NanoRF SIZE: A2 CAGE CODE: 00779 DRAWING NO: C-2401218 RESTRICTED TO: - SCALE: 20:1 SHEET: 1 OF 1 REV: A		