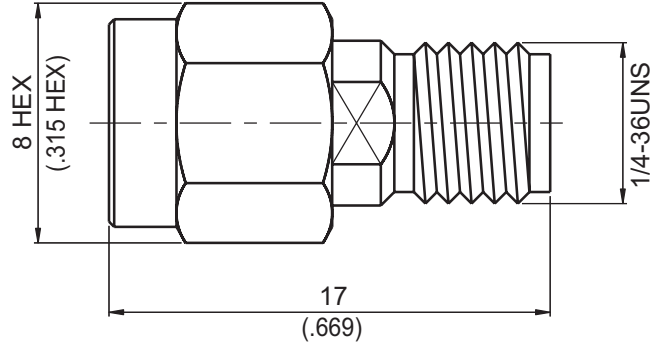


<b>AD-A3A8</b>	<b>SMA Plug To SMA Jack</b>	<b>50Ω</b>																																							
																																									
<p>Typical VSWR</p> <table border="1" style="margin: auto; border-collapse: collapse;"> <thead> <tr> <th>Part Number</th> <th>1 GHz</th> <th>2 GHz</th> <th>3 GHz</th> <th>4 GHz</th> <th>5 GHz</th> <th>6 GHz</th> <th>7 GHz</th> <th>8 GHz</th> <th>9 GHz</th> </tr> </thead> <tbody> <tr> <td rowspan="2" style="text-align: center;">AD-A3A8</td> <td style="text-align: center;">1.03</td> <td style="text-align: center;">1.03</td> <td style="text-align: center;">1.04</td> <td style="text-align: center;">1.04</td> <td style="text-align: center;">1.05</td> <td style="text-align: center;">1.11</td> <td style="text-align: center;">1.12</td> <td style="text-align: center;">1.12</td> <td style="text-align: center;">1.18</td> </tr> <tr> <td style="text-align: center;">10 GHz</td> <td style="text-align: center;">11 GHz</td> <td style="text-align: center;">12 GHz</td> <td style="text-align: center;">13 GHz</td> <td style="text-align: center;">14 GHz</td> <td style="text-align: center;">15 GHz</td> <td style="text-align: center;">16 GHz</td> <td style="text-align: center;">17 GHz</td> <td style="text-align: center;">18 GHz</td> </tr> <tr> <td></td> <td style="text-align: center;">1.18</td> <td style="text-align: center;">1.18</td> <td style="text-align: center;">1.19</td> <td style="text-align: center;">1.19</td> <td style="text-align: center;">1.19</td> <td style="text-align: center;">1.19</td> <td style="text-align: center;">1.19</td> <td style="text-align: center;">1.19</td> <td style="text-align: center;">1.19</td> </tr> </tbody> </table>			Part Number	1 GHz	2 GHz	3 GHz	4 GHz	5 GHz	6 GHz	7 GHz	8 GHz	9 GHz	AD-A3A8	1.03	1.03	1.04	1.04	1.05	1.11	1.12	1.12	1.18	10 GHz	11 GHz	12 GHz	13 GHz	14 GHz	15 GHz	16 GHz	17 GHz	18 GHz		1.18	1.18	1.19	1.19	1.19	1.19	1.19	1.19	1.19
Part Number	1 GHz	2 GHz	3 GHz	4 GHz	5 GHz	6 GHz	7 GHz	8 GHz	9 GHz																																
AD-A3A8	1.03	1.03	1.04	1.04	1.05	1.11	1.12	1.12	1.18																																
	10 GHz	11 GHz	12 GHz	13 GHz	14 GHz	15 GHz	16 GHz	17 GHz	18 GHz																																
	1.18	1.18	1.19	1.19	1.19	1.19	1.19	1.19	1.19																																
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Parts</th> <th>Material</th> <th>Plating (Micro-inch)</th> </tr> </thead> <tbody> <tr> <td>Renber Ring</td> <td>Beryllium Copper</td> <td>Tin-Zinc-Copper-Alloy 100 Over Copper 50</td> </tr> <tr> <td>Gasket</td> <td>Silicone</td> <td></td> </tr> <tr> <td>Contact Pin</td> <td>Beryllium Copper</td> <td>Gold 10 Over Nickel 50 Over Copper 50</td> </tr> <tr> <td>Insulator</td> <td>Teflon</td> <td></td> </tr> <tr> <td>Body</td> <td>Brass</td> <td>Gold 5 Over Nickel 50 Over Copper 50</td> </tr> <tr> <td>Coupling Nut</td> <td>Brass</td> <td>Gold 5 Over Nickel 50 Over Copper 50</td> </tr> </tbody> </table>			Parts	Material	Plating (Micro-inch)	Renber Ring	Beryllium Copper	Tin-Zinc-Copper-Alloy 100 Over Copper 50	Gasket	Silicone		Contact Pin	Beryllium Copper	Gold 10 Over Nickel 50 Over Copper 50	Insulator	Teflon		Body	Brass	Gold 5 Over Nickel 50 Over Copper 50	Coupling Nut	Brass	Gold 5 Over Nickel 50 Over Copper 50																		
Parts	Material	Plating (Micro-inch)																																							
Renber Ring	Beryllium Copper	Tin-Zinc-Copper-Alloy 100 Over Copper 50																																							
Gasket	Silicone																																								
Contact Pin	Beryllium Copper	Gold 10 Over Nickel 50 Over Copper 50																																							
Insulator	Teflon																																								
Body	Brass	Gold 5 Over Nickel 50 Over Copper 50																																							
Coupling Nut	Brass	Gold 5 Over Nickel 50 Over Copper 50																																							
<p>Weight: 4.56 g</p>																																									

**Notice:** JYEBAO reserves the right to make modifications deemed appropriate.