

N3100AS-L600	Stainless N Plug Crimp	50Ω																														
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 15%;">Parts</th> <th style="width: 15%;">Material</th> <th style="width: 70%;">Plating(Micro-inch)</th> </tr> </thead> <tbody> <tr> <td>Ferrule</td> <td>Brass</td> <td>Tin-Zinc-Copper-Alloy 100 Over Copper 50</td> </tr> <tr> <td>Barrel</td> <td>Stainless Steel</td> <td>Passivated</td> </tr> <tr> <td>Insulator</td> <td>Teflon</td> <td></td> </tr> <tr> <td>Retainer Ring</td> <td>Brass</td> <td>Tin-Zinc-Copper-Alloy 100 Over Copper 50</td> </tr> <tr> <td>Gasket</td> <td>Silicon</td> <td></td> </tr> <tr> <td>Contact Body</td> <td>Stainless Steel</td> <td>Passivated</td> </tr> <tr> <td>Contact Pin</td> <td>Brass</td> <td>Gold 5 Over Nickel 50 Over Copper 50</td> </tr> <tr> <td>Body</td> <td>Stainless Steel</td> <td>Passivated</td> </tr> <tr> <td>Coupling Nut</td> <td>Stainless Steel</td> <td>Passivated</td> </tr> </tbody> </table>			Parts	Material	Plating(Micro-inch)	Ferrule	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50	Barrel	Stainless Steel	Passivated	Insulator	Teflon		Retainer Ring	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50	Gasket	Silicon		Contact Body	Stainless Steel	Passivated	Contact Pin	Brass	Gold 5 Over Nickel 50 Over Copper 50	Body	Stainless Steel	Passivated	Coupling Nut	Stainless Steel	Passivated
Parts	Material	Plating(Micro-inch)																														
Ferrule	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50																														
Barrel	Stainless Steel	Passivated																														
Insulator	Teflon																															
Retainer Ring	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50																														
Gasket	Silicon																															
Contact Body	Stainless Steel	Passivated																														
Contact Pin	Brass	Gold 5 Over Nickel 50 Over Copper 50																														
Body	Stainless Steel	Passivated																														
Coupling Nut	Stainless Steel	Passivated																														
<p>Weight: Suitable Cables: JBY600,LMR600</p>																																

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

CABLE ASSEMBLY INSTRUCTION

N3100AS-L600

JYE BAO CO., LTD.

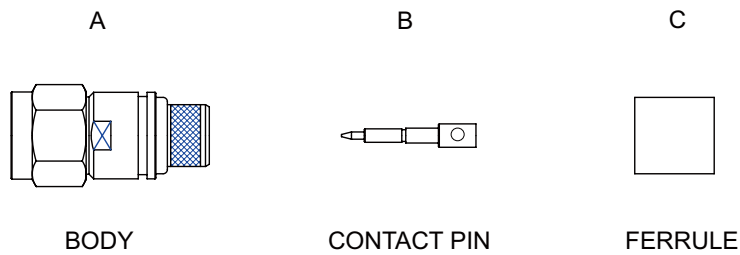


DIAGRAM	ASSEMBLY INSTRUCTION
	<p>Step 1: STRIP AS SHOWN .</p>
	<p>Step 2: SLIDE FERRULE " C " OVER CABLE. Step 3: PUT PIN " B " ON CENTER CONDUCTOR AND CRIMP OR SOLDER IN " Y " .</p>
	<p>Step 4: LOOSEN BRAIDING AND SLIDE CONNECTOR " A " IN PLACE.</p>
	<p>Step 5: SLIDE FERRULE " C " TOWARDS THE CONNECTOR " A " AND CRIMP.</p>

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.