

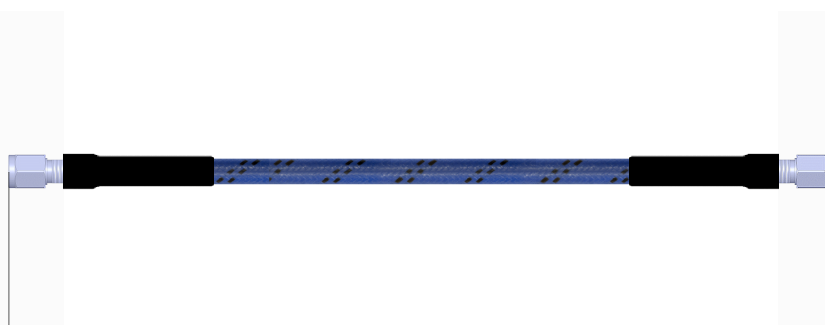
PAGE 1/1

 ISSUE **18/12/2019**

 SERIES **TestPro Cable**

 PART NUMBER **2001481480914ZT**

All dimensions are in mm
For more details, please see connectors TDS


DESIGNATION

Cable	Armoured measurement cable - P/N - TestPro 2
Connector Left	1.85 mm - straight plug - Passivated stainless steel - P/N: R327900021
Connector Right	1.85 mm - straight plug - Passivated stainless steel - P/N: R327900021
Assembly Length	914 mm / 35.98 inch (tolerance = ± 2%)
Assembly Weight	156.88 gr / 5.53 oz (tolerance = ± 5%)

ELECTRICAL CHARACTERISTICS

Characteristic impedance	50 Ohms
Max operating frequency	67.0 GHz
Assembly Typ Insertion Loss	6.07 dB (at 20 °C, at 67.0 GHz)
Assembly Typ VSWR	1.45 (at 67.0 GHz)
Assembly Max. Insertion Loss	7.06 dB (at 20 °C, at 67.0 GHz)
Assembly Max VSWR	1.50 (at 67.0 GHz)
Assembly Max Return Loss	14.0 dB (at 67.0 GHz)
Phase stability vs. Temp	4° / m / GHz (-55° / +100°C)
Dielectric withstanding voltage	500 V
Insulation resistance	5000 M.Ohms
Other	Amplitude stability typ. (dB) 0.04 @ 50GHz / 0.05 @ 67GHz Phase with flexure stability typ. 6° @ 50GHz / 8° @ 67GHz Note: Max IL are indicative only when superior to 40dB

MECHANICAL CHARACTERISTICS

Cable Outer diameter	6.2 mm Max 0.244 inch
Static bending radius	25.0 mm 0.98 inch
Dynamic bending radius	50.0 mm 1.97 inch
Other	Flexure life cycle > 20,000 Mating cycles durability > 5,000

ENVIRONMENTAL CHARACTERISTICS

Temperature range	-55 +125°C
Fire resistance	Yes
RoHS	Yes