


PART NO.	A DIM.	B DIM.	1 - 9	10 - 24	25 - 49	50 - 99	100 +
336-CC375SF	.705	.590	\$11.00	\$10.00	\$9.00	\$8.25	\$7.75
336-CC37580SF	.300	.090	\$11.50	\$10.50	\$9.50	\$8.75	\$8.25
336-CC37581SF	.230	.110	\$11.50	\$10.50	\$9.50	\$8.75	\$8.25
336-CC37582SF	.245	.110	\$11.50	\$10.50	\$9.50	\$8.75	\$8.25
336-CC37583SF	.300	.145	\$11.50	\$10.50	\$9.50	\$8.75	\$8.25
336-CC37584SF	.375	.175	\$11.50	\$10.50	\$9.50	\$8.75	\$8.25
336-CC37585SF	.260	.200	\$11.50	\$10.50	\$9.50	\$8.75	\$8.25
336-CC37586SF	.290	.210	\$11.50	\$10.50	\$9.50	\$8.75	\$8.25
336-CC37587SF	.290	.240	\$11.50	\$10.50	\$9.50	\$8.75	\$8.25
336-CC37588SF	.475	.375	\$11.50	\$10.50	\$9.50	\$8.75	\$8.25

5. VSWR NOT TO EXCEED 1.25 :1 THRU 18 GHz  
 4. RECEPTACLE TO MEET OR EXCEED ALL SPECIFICATIONS PER MIL-39012

3. FINISH:  
 BODY: PASSIVATE PER QQ-P-35  
 CONTACT: GOLD PER MIL-G-45204: TYPE II,  
 CLASS 2, OVER COPPER PER MIL-C-14550, CLASS 4  
 2. MATERIAL:  
 BODY: STAINLESS STL PER QQ-S-764 TYPE 303  
 CONTACT: BERYL. COPPER PER QQ-C-530  
 INSULATOR: TEFLON PER MIL-P-19468A  
 1. MATING DIMS IN ACCORDANCE WITH MIL-STD-348

NOTES :

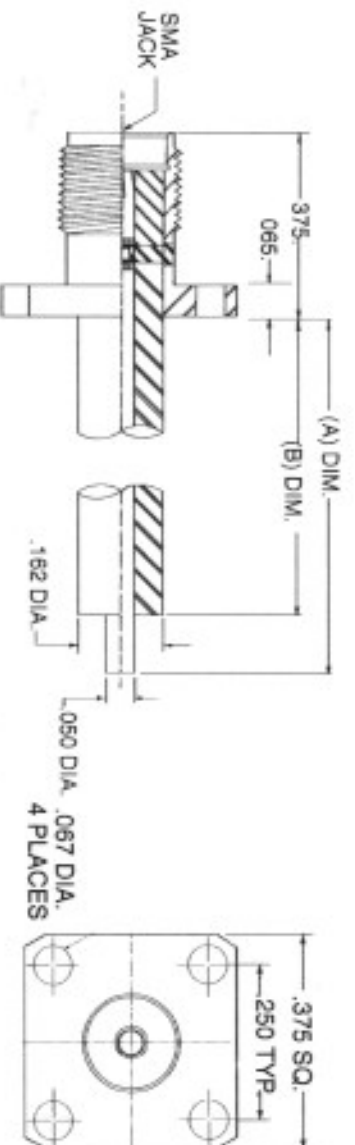

**NOTICE**

This drawing is a CONCEPTUAL, preliminary design originated by United Microwave Products, Inc. and all dimensions, tolerances, reproduction, use and sale rights regarding the herein are expressly reserved. It is submitted under a conditional understanding for a specific purpose and the recipient agrees by accepting this drawing not to accept or depend on its reproduction for any unauthorized purposes. It is not to be used for any other purpose without the express written approval of United Microwave Products Inc.

WEIGHT	SCALE
N/A	NONE

**TOLERANCES AND NOTES** except as noted

- DIMENSIONS ARE IN INCHES  
 UNLESS NOTED OTHERWISE  
 UNLESS OTHERWISE SPECIFIED: 1.32
- UNLESS OTHERWISE SPECIFIED: .005
  - BRASS ALL SHARP EDGES .002
  - ALL MACHINED SURFACES TO BE FINISHED TO .0005
  - ALL MACHINED SURFACES SQUARE TO RESPECTIVE AXES WITHIN .002 PER ACH
  - UNFINISHED DIAMETERS TO BE CONCENTRIC WITHIN .002 - .003 T.I.R.
  - DIMENSIONS TO BE MET BEFORE PLATING
  - CHAMFER ALL 1"-9" 45 DEGREES
  - REMOVE PERMITS 1-98
  - REMOVE PROVED SCISSORS ON TYPICAL
  - REMOVE ALL BURRS

MATERIAL	SIZE	SPECIFICATION	PROCUREMENT
<b>UNITED MICROWAVE PRODUCTS Inc.</b>			
SMA JACK 4 HOLE 375 SQ. FLANGE MOUNT			
EXTENDED STRAIGHT TERMINAL CAPTIVE CONTACT			
APPR			
ENCL			
CHK			
DR			
<b>336-CC-375-SF</b>			