
REVISIONS								
REV.	DESCRIPTION	DATE	APPROVED					
А	INITIAL RELEASE	07/28/11	J.S.					

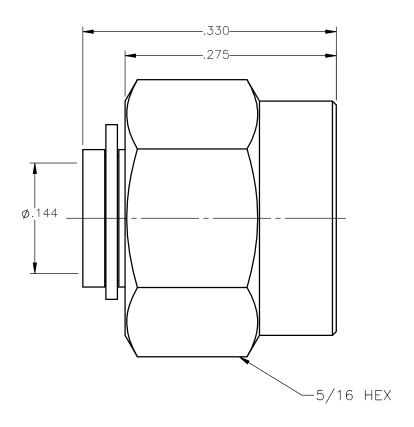

NOTES:

MATERIALS:

- BODY = STAINLESS STEEL PER ASTM A582, ALLOY 303, CONDITION "A". COUPLING NUT = STAINLESS STEEL PER ASTM A582, ALLOY 303, CONDITION "A". RETAINING RING = BERYLLIUM COPPER PER ASTM B196, ALLOY C17300, TEMPER TD04. GASKET = SILICONE RUBBER PER ZZ-R-765, CLASS 2B, GRADE 65-75.

FINISHES:

- BODY = GOLD PLATE PER MIL-G-45204, TYPE II, CLASS 0, GRADE C, OVER .000050 TO .00010 STRESS FREE NICKEL PER QQ-N-290. COUPLING NUT = PASSIVATE PER QQ-P-35, TYPE VI. RETAINING RING = NICKEL PLATE PER QQ-N-290, CLASS 1, GRADE G, EXCEPT .0001 TO .0002 THICK OVER .00005 TO .0001 THICK COPPER PER MIL-C-14550.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON		DWN: J.S. CHKD:	DATE 07/28/11 DATE	AEP 3 RADIAL	,	Property of Radiall This document cannot be reproduced or communicated to a third party without prior written permission of RADIALL.			W.
DECIMAL	ANGLE	D.N. APVD: J.M.	07/28/11 DATE 07/28/11		STR	AIGHT	PLUG FOF & SIMILAF		ES
REFERENCE: ORIGINATED: J.S.		MATERIALS & FINIS SEE NOTE		size A	FSCM NO. 19505	DWG NO.	631-1063	-009	REV A
DATE: 07/28/11				SCALE	8:1	THIRD A PROJE	ANGLE CTION TO THE CTION	SHEET 1 O	F 1