




REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	01/18/12	J.S.

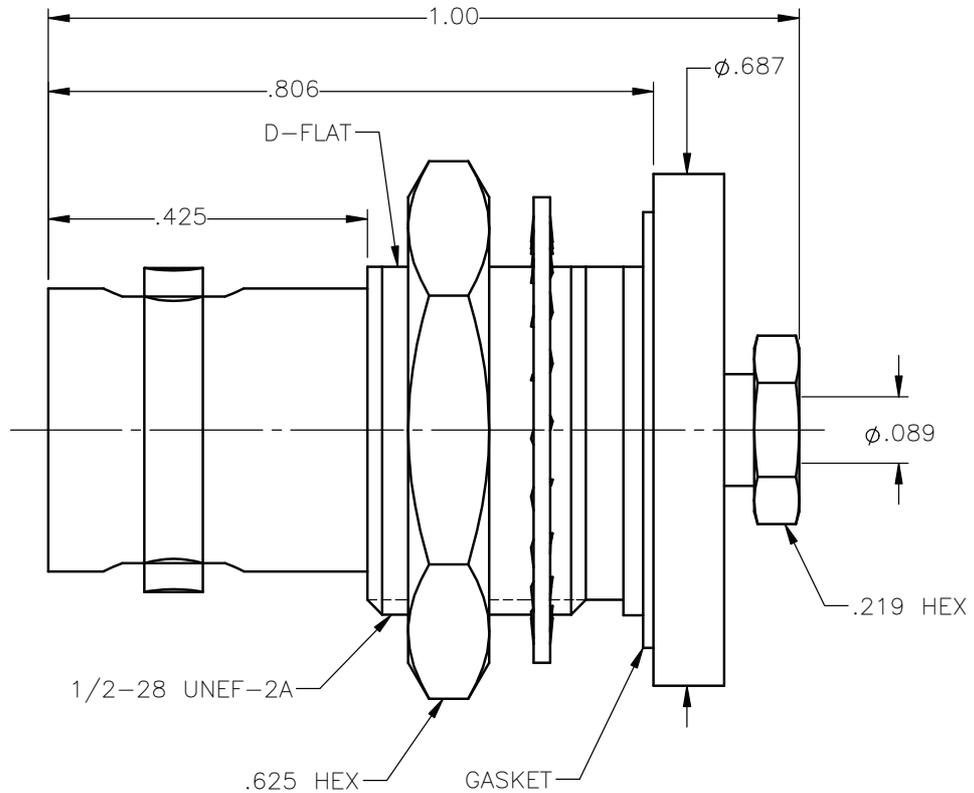

NOTES:

MATERIALS:

1. INSULATORS = VIRGIN WHITE TEFLON PER ASTM D1710, GRADE 1, TYPE I, CLASS "B".
2. CONTACT & FERRULE = BERYLLIUM COPPER PER ASTM B196, ALLOY C17300, TEMPER TD04.
3. LOCKWASHER = PHOSPHOR BRONZE PER ASTM B139, COPPER ALLOY C53400, TEMPER H04.
4. "O" RINGS = SILICONE RUBBER PER ZZ-R-765, CLASS 2B, GRADE 65-75.
5. GASKET = SILICONE RUBBER 45-55 DUROMETER DOW CORNING SILASTIC 250.
6. ALL OTHER METAL PARTS = BRASS PER ASTM B16, ALLOY C36000, TEMPER H02.

FINISHES:

1. CONTACT = GOLD PLATE PER MIL-G-45204, TYPE II, CLASS 1, GRADE C, OVER .00010 TO .00020 STRESS FREE SULFAMATE NICKEL PER QQ-N-290.
2. ALL OTHER METAL PARTS = NICKEL PLATE PER QQ-N-290, CLASS 1, GRADE G, EXCEPT .0001 TO .0002 THICK OVER .00005 TO .0001 THICK COPPER PER MIL-C-14550.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON		DWN: J.S.	DATE: 01/18/12	 <b>Property of Radiall</b> This document cannot be reproduced or communicated to a third party without prior written permission of RADIALL.	
DECIMAL	ANGLE	CHKD: D.N.	DATE: 01/18/12		
		APVD: J.M.	DATE: 01/18/12		
REFERENCE: 1011221 ORIGINATED: J.S. DATE: 01/18/12		MATERIALS & FINISHES: SEE NOTES		BNC STRAIGHT JACK WATERTIGHT BULKHEAD REAR MOUNT CLAMP TYPE FOR RG178 AND SIMILAR CABLES SIZE: A FSCM NO.: 19505 DWG NO.: 6501-7551-602 REV: A	
		SCALE: 4:1		THIRD ANGLE PROJECTION	SHEET 1 OF 1

6501-7551-602