


NOTICE OF PROPRIETARY RIGHTS THIS DOCUMENT CONTAINS CONFIDENTIAL DATA, INCLUDING TRADE SECRETS, PROPRIETARY TO TIMES MICROWAVE SYSTEMS. DISCLOSURE OF THIS DATA IS EXPRESSLY CONDITIONED UPON YOUR ASSENT THAT ITS USE IS LIMITED TO USE WITHIN YOUR COMPANY ONLY. ANY OTHER USE IS STRICTLY PROHIBITED WITHOUT THE PRIOR WRITTEN CONSENT OF TIMES MICROWAVE SYSTEMS.

SYM	REVISION DESCRIPTION	DFTM	DATE	APPD	APPD
A	RELEASED FOR PRODUCTION	Joslen	2014.08.08	TZ	2014.08.08
B	Added mark	Joslen	05/24/2016	TZ	05/24/2016

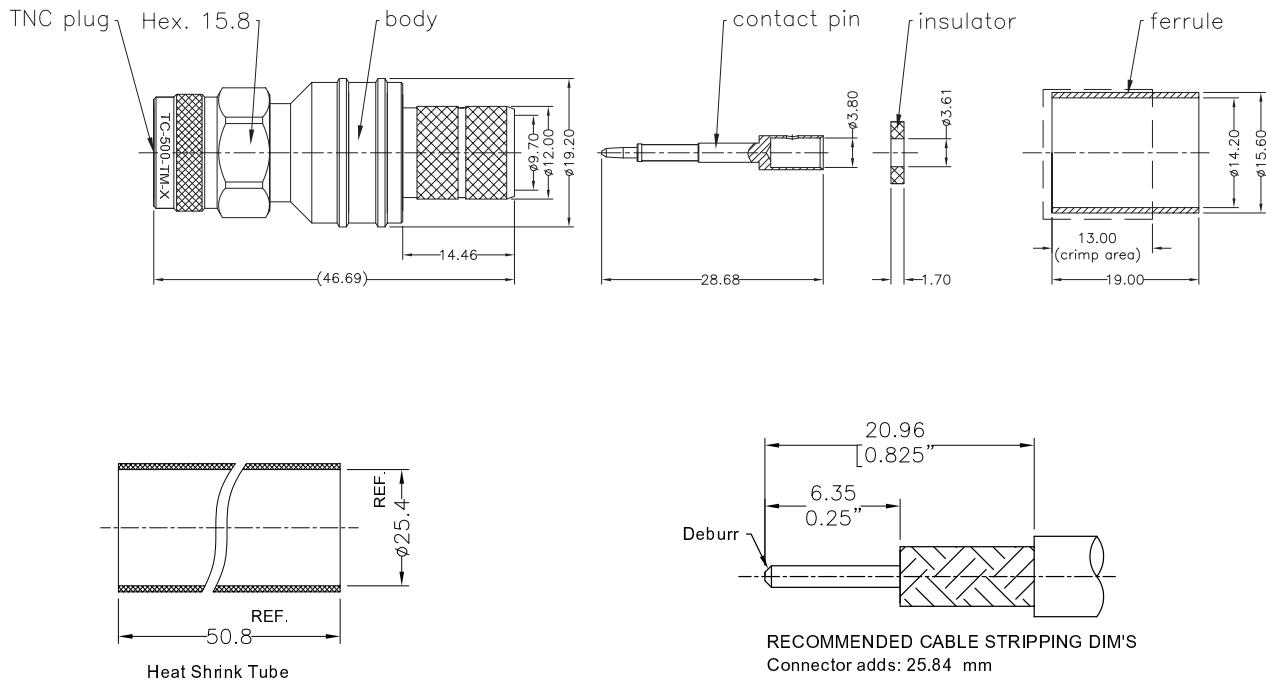

I. MATERIALS & FINISHES

Components	Materials	Finishes	Thk. (μ)
Body/Shell	Brass	Albaloy	80
Center Cont.	Brass	Gold	50
Ferrule	Brass	Albaloy	80
Insulator	PTFE	--	--
Gasket	Silicone	--	--

II. ELECTRICAL PROPERTIES

Impedance (Ω):	50
Frequency Range (GHz):	DC to 6 GHz
Working Voltage (V):	1000
Insulation Resistance ($M\Omega$):	≥ 10000
VSWR:	≤ 1.30
Insertion Loss(dB, f/GHz):	$-0.1x \sqrt{f}$

III. ENVIRONMENT PROPERTIES

Temperature Range:	-55°C ~ +125°C
Thermal Shock:	MIL-STD 202G, Meth.107, Cond.B
Vibration:	MIL-STD 202G, Meth.204, Cond.B
Shock:	MIL-STD 202G, Meth.213, Cond I
Climatic Class:	IEC 60068 55/155/56
(2002/95/EC)RoHS:	Compliant

IV. MECHANICAL PROPERTIES

Center Cont.:	Solder
Outer Cont.:	Crimp
Coupling Nut Torque (N.m):	1.1
Cbl-Connector Retention Force (N):	850
Durability (cycles):	500

V. TOOLING

Stripping Tool: 3192-075/CST500
Crimping Tool: 3192-181/3190-465

According to Standard: IEC 61169-17

MATERIALS:	UNLESS OTHERWISE SPECIFIED			DFTM:	Joslen	 TIMES MICROWAVE SYSTEMS An Amphenol Company
	ALL DIMENSIONS ARE IN mm MACHINED SURFACES FINISH 1.6 RMS MAX. REMOVE ALL BURRS 0.15X45° MAX. BREAK MACHINE CORNERS 0.15X45° D MAX. FILLET R. TOLERANCES ON DECIMALS .X ±0.3 .XX ±0.15 ANGLES ±2° FRACTIONS ± N/A			DATE	05/24/2016	
USED ON: O				CHKD	KG	TC-500-TM-X
				DATE	05/24/2016	TNC Male (Plug) Straight Solder Pin Connector for LMR-500 Cable
SCALE: N/A	DWG SIZE A4	DO NOT SCALE DRAWING	CODE IDENT	68999	APPD TZ	S T 1 OF 1 3190-6009 R E V B